



3500 Pelco Way,
Clovis, CA 93612-5699
USA

In North America & Canada:
Tel (800) 289-9100
FAX (800) 289-9150

International Customers:
Tel +1(559) 292-1981
FAX +1(559) 348-1120

www.pelco.com

C912M-A (4/00) LB2000 Vertical Lock Box

DESCRIPTION

The LB2000 Vertical Lock Box protects tower-type computer disk drives or other vertical-standing devices from intruders. It is designed for desktop mounting applications only. The enclosure is constructed from steel and features a smoked acrylic window and tamper-resistant lock.

INSTALLATION

The LB2000 Vertical Lock Box is provided with numerous 5/16-inch holes for mounting to solid surfaces.

CAUTION: *Care should be taken when installing or removing the equipment so that no weight is applied to the front cover. Be careful not to scratch the cover.*

To mount the vertical lock box, perform the following steps:

1. Remove the vertical lock box from the box.
2. Find a suitable mounting surface for the lock box.
3. Unlock the front panel and open the top lid.
4. Drill four pilot holes in the mounting surface.
5. Using appropriate mounting screws, screw the enclosure to the mounting surface.
6. Connect the power cord to a duplex receptacle.
7. Remove one of the rear plugs or knock-outs and run the cables.
8. Place the equipment in the lock box and plug it into the convenience receptacle.
9. Close the top cover.
10. Start the equipment.
11. Close and lock the front cover.

MAINTENANCE

Maintenance performed at regularly scheduled intervals will help prolong life and appearance of the equipment.

1. Clean the window with a mild non-abrasive detergent in water and a soft cloth regularly to help maintain picture clarity.
2. Clean or replace the foam filter pad in the rear of the enclosure periodically. To replace or clean the filter pad, perform the following steps:
 - a. Pry the grill loose from the filter assembly at the rear of the box.
 - b. Remove the filter pad from the filter bracket. Clean the pad with water and mild detergent, dry thoroughly, and reinsert or replace with new pads. (Replacement pads, part number FLTRF450-A/45, are available from Pelco).

SPECIFICATIONS


Dimensions:	See Figure 1
Construction	
Rack:	16-gauge cold rolled steel
Front Window:	.25-inch (6.35 mm) thick smoked acrylic
Finish:	Black polyester powder coat
Power Connection:	Internal convenience receptacle
Cooling:	Internal 4-inch (10.16 cm) square fan, 120 VAC, continuous duty
Fusing:	3A, Type 3AG
Cable Entry:	Two .50-inch (1.27 cm) conduit knockouts Two 1-inch (2.54 cm) grommeted cable ducts

Maximum Load Capacity: 30 lb (13.50 kg)

Weight: 25 lb (11.33 kg)

Rating: NEMA 1

(Design and product specifications subject to change without notice.)

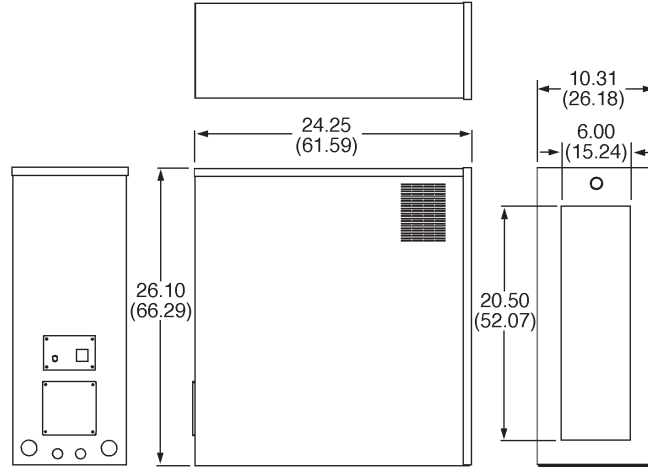

NOTE: VALUES IN PARENTHESES ARE CENTIMETERS;
ALL OTHERS ARE INCHES.

Figure 1. LB2000 Vertical Lock Box Dimension Drawing

PRODUCT WARRANTY AND RETURN INFORMATION

WARRANTY

Pelco will repair or replace, without charge, any merchandise proved defective in material or workmanship for a period of one year after the date of shipment.

Exceptions to this warranty are as noted below:

- Five years on FT/FR8000 Series fiber optic products.
- Three years on Genex® Series products (multiplexers, server, and keyboard).
- Three years on Camclosure® and fixed camera models, except the CC3701H-2, CC3701H-2X, CC3751H-2, CC3651H-2X, MC3651H-2, and MC3651H-2X camera models, which have a five-year warranty.
- Two years on standard motorized or fixed focal length lenses.
- Two years on Legacy®, CM6700/CM6800/CM9700 Series matrix, and DF5/DF8 Series fixed dome products.
- Two years on Spectra®, Esprit®, ExSite®, and PS20 scanners, including when used in continuous motion applications.
- Two years on Esprit® and WW5700 Series window wiper (excluding wiper blades).
- Eighteen months on DX Series digital video recorders, NVR300 Series network video recorders, and Endura™ Series distributed network-based video products.
- One year (except video heads) on video cassette recorders (VCRs). Video heads will be covered for a period of six months.
- Six months on all pan and tilts, scanners or preset lenses used in continuous motion applications (that is, preset scan, tour and auto scan modes).

Pelco will warrant all replacement parts and repairs for 90 days from the date of Pelco shipment. All goods requiring warranty repair shall be sent freight prepaid to Pelco, Clovis, California. Repairs made necessary by reason of misuse, alteration, normal wear, or accident are not covered under this warranty.

Pelco assumes no risk and shall be subject to no liability for damages or loss resulting from the specific use or application made of the Products. Pelco's liability for any claim, whether based on breach of contract, negligence, infringement of any rights of any party or product liability, relating to the Products shall not exceed the price paid by the Dealer to Pelco for such Products. In no event will Pelco be liable for any special, incidental or consequential damages (including loss of use, loss of profit and claims of third parties) however caused, whether by the negligence of Pelco or otherwise.

The above warranty provides the Dealer with specific legal rights. The Dealer may also have additional rights, which are subject to variation from state to state.

If a warranty repair is required, the Dealer must contact Pelco at (800) 289-9100 or (559) 292-1981 to obtain a Repair Authorization number (RA), and provide the following information:

1. Model and serial number
2. Date of shipment, P.O. number, Sales Order number, or Pelco invoice number
3. Details of the defect or problem

If there is a dispute regarding the warranty of a product which does not fall under the warranty conditions stated above, please include a written explanation with the product when returned.

Method of return shipment shall be the same or equal to the method by which the item was received by Pelco.

RETURNS

In order to expedite parts returned to the factory for repair or credit, please call the factory at (800) 289-9100 or (559) 292-1981 to obtain an authorization number (CA number if returned for credit, and RA number if returned for repair).

All merchandise returned for credit may be subject to a 20% restocking and refurbishing charge.

Goods returned for repair or credit should be clearly identified with the assigned CA or RA number and freight should be prepaid. Ship to the appropriate address below.

If you are located within the continental U.S., Alaska, Hawaii or Puerto Rico, send goods to:

Service Department
Pelco
3500 Pelco Way
Clovis, CA 93612-5699

If you are located outside the continental U.S., Alaska, Hawaii or Puerto Rico and are instructed to return goods to the USA, you may do one of the following:

If the goods are to be sent by a COURIER SERVICE, send the goods to:

Pelco
3500 Pelco Way
Clovis, CA 93612-5699 USA

If the goods are to be sent by a FREIGHT FORWARDER, send the goods to:

Pelco c/o Expeditors
473 Eccles Avenue
South San Francisco, CA 94080 USA
Phone: 650-737-1700
Fax: 650-737-0933

REVISION HISTORY

Manual #	Date	Comments
C912M	1/91	Original version.
C912M-A	4/00	Updated manual to new format. Revised window color from clear to smoked per ECO #00-5992.